



中国认可
国际互认
检测
TESTING
CNAS L4743

Test Report

Report No.

Date: JUL.24, 2024

Page 1 of 5

Sample Description: 708 NIGHT-INHERENT FLAME RETARDANT LINEN BLACKOUT FABRIC

Color: GRAY

Style/Item No.: /

Composition: 100%POLYESTER

Country of Destination: FRANCE

Supplier:

Client Reference Info:

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

NF P 92-507:2004 Fire safety-building-interior fitting materials-Classification according to their reaction to fire.

Test Results: -- See attached sheet --

Conclusion:

Classification: M1

Note: The classes with their corresponding fire performance are given in Annex I.

Test Period:

Sample Receiving Date : JUL.18, 2024

Test Performing Date : JUL.18, 2024 TO JUL.24, 2024

Signed for and on behalf of

SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch

Echo

Echo Li

Approved Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Test Report

Report No.

Date: JUL.24, 2024

Page 2 of 5

I. Test conducted

This test was conducted according to NF P 92-507:2004 Fire safety--building-interior fitting materials -- Classification according to their reaction, and the test methods as following:

1. NF P 92-503:1995 Safety against fire - Building materials – Reaction to fire tests Electrical burner test used for flexible materials.
2. NF P 92-504:1995 Safety against fire -- Building materials -- Reaction to fire tests -- Flame persistence test and speed of the spread of flame.

II. Sample details

Sample description	Fabric
Color	Grey
Area density	About 345 g/m ²
Specimen size	600mm×180mm (NF P 92-503) 460mm×230mm (NF P 92-504)

III. Conditioning

Prior to testing, the sample was conditioned in an atmosphere having a temperature of 23±2°C and a relative humidity of 50±5% for 7 days or until constant mass is obtained.

IV. Test results

i) NF P 92-503:1995 Electrical burner test

Face, Length

During the testing, the following details are noted	1	2	3	4	Average
Hole (Yes/No)	Yes	Yes	Yes	Yes	
Applied time (s)	20	20	20	20	
Max. afterflame time after withdrawal the pilot flame (s)	3	2	4	1	2.5
Afterglow time (s)	0	0	0	0	0
Flaming molten droplets (Yes/No)	No	No	No	No	
Non-flaming molten droplets (Yes/No)	No	No	No	No	
Flaming debris (Yes/No)	No	No	No	No	
Non-flaming debris (Yes/No)	No	No	No	No	
White-hot spots with propagation effects (Yes/No)	No	No	No	No	



Test Report

Report No.

Date: JUL.24, 2024

Page 3 of 5

After testing, the following details are noted	1	2	3	4
Max. destruction length from the lower edge (mm)	55	51	58	47
Average destruction length (mm)	52.8			
Max. width of the destroyed zones between 450mm and 600mm from the test piece lower edge (mm)	0	0	0	0
Average destroyed width (mm)	0			

ii) NF P 92-504:1995 Flame persistence test

Face, Length

Ignition time	After-flame time (s)	Flaming Drops (Yes/No)	Non-flaming Drops (Yes/No)	Ignition times	After-flame time (s)	Flaming Drops (Yes/No)	Non-flaming Drops (Yes/No)
1	0	No	No	16	0	No	No
2	0	No	No	17	0	No	No
3	0	No	No	18	0	No	No
4	0	No	No	19	0	No	No
5	0	No	No	20	0	No	No
6	0	No	No	21	0	No	No
7	0	No	No	22	0	No	No
8	0	No	No	23	0	No	No
9	0	No	No	24	0	No	No
10	0	No	No	25	0	No	No
11	0	No	No	26	0	No	No
12	0	No	No	27	0	No	No
13	0	No	No	28	0	No	No
14	0	No	No	29	0	No	No
15	0	No	No	30	0	No	No
Number of tested samples		4					



Test Report

Report No.

Date: JUL.24, 2024

Page 4 of 5

Annex I, Requirements

Table 1 Resume of classification for flexible materials which thickness no more than 5mm

Test Items	Criteria of classification				
Test for hot melt materials		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Electrical Burner Test ^{a)}	No drops	Non-flaming molten droplets	Flaming drops or debris	Non-flaming molten droplets	Flaming drops or debris
Inflammation ≤ 5s	M1	M1	M2	M4	M4
Inflammation > 5s and Average destroyed length <350 mm	M2	M2	M3	M4	M4
Inflammation > 5s and Average destroyed width <90 mm between the 450 mm and 600 mm in length	M3	M3	M4	M4	M4
Flame Spread Test (flame spread <2 mm/s)			M4	M4	M4

^{a)} If the materials presented a particular behaviour, the classification also need to refer to Table 3.
The details of classification M0 refer to clause 3.3 of NF P 92-507:2004.


Table 3 Resume of classification for the materials presented a particular behaviour

Test Items	Criteria of classification				
Test for hot melt materials		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Flame Persistence Test	No drops	Non-flaming molten drops	Flaming drops or debris	Non-flaming molten drops	Flaming drops or debris
Flame persistence time≤2s	M1	M1	M2	M4	M4
Flame persistence time≤5s	M2	M2	M3	M4	M4
Flame persistence time >5s and Flame Spread <2 mm/s	M3	M3	M4	M4	M4

Statement: This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.



Photo Appendix:

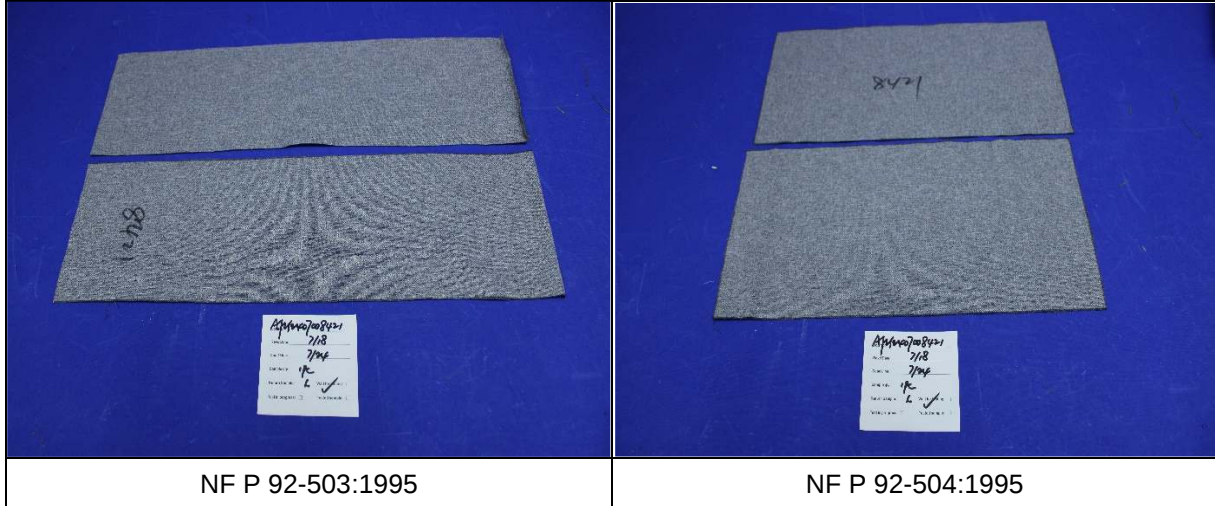

SGS authenticate the photo on original report only

End of Report